


Top Exit Venting

The GaboGas Stove has been tested and listed for installation with the Simpson Duravent GS and ***Selkirk DT** venting components. The total vent length should not exceed 36 feet. The maximum horizontal run is 12 feet. No more than three elbows may be used in the installation. After one elbow is used, four feet of horizontal run must be subtracted for each additional elbow. The stove

may be vented in either top or rear exit configuration. Rear exit information is on page 9. Refer to the chart below to determine the correct settings of the inlet plate and outlet restricter gap for the type of fuel and vent configuration. All venting above the red line must incorporate a stainless steel liner.

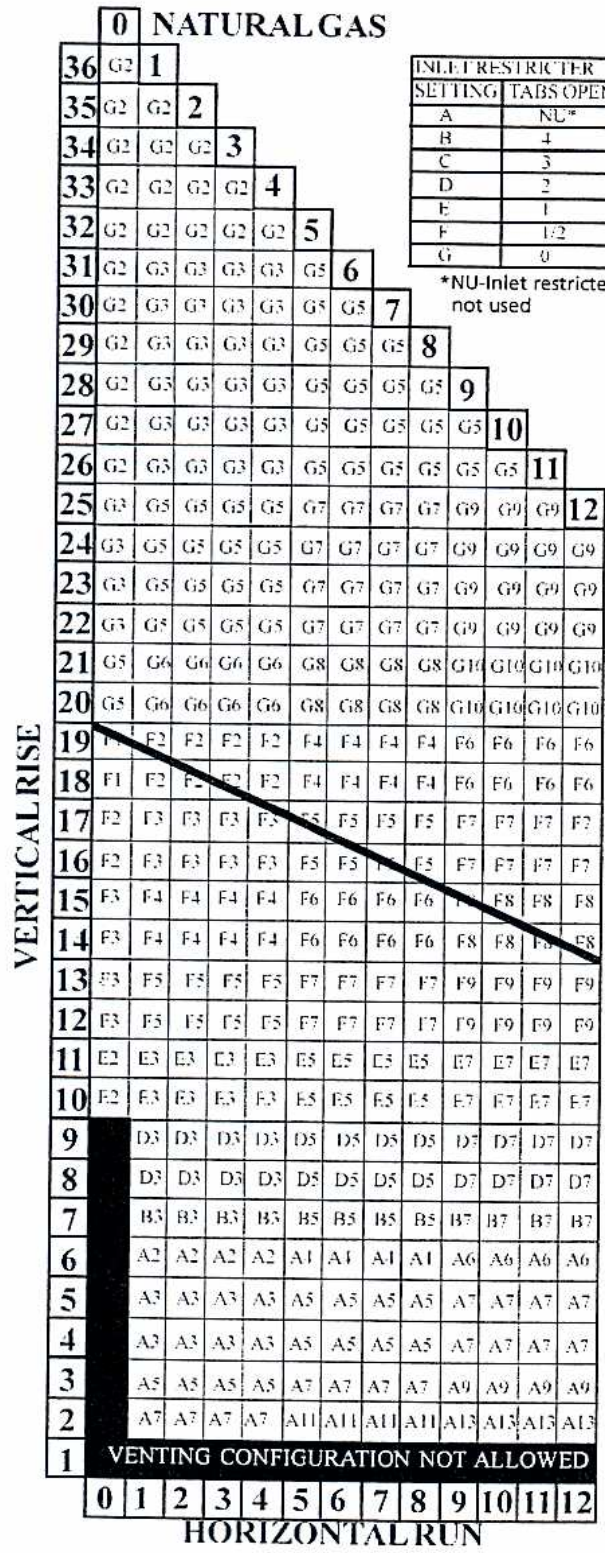

INLET RESTRICTER		OUTLET BAFFLE	
SETTING	TABS OPEN	SETTING	GAP(IN)
A	NU*	1	1/8
B	4	2	3/16
C	3	3	1/4
D	2	4	5/16
E	1	5	3/8
F	1/2	6	7/16
G	0	7	1/2
		8	9/16
		9	5/8
		10	11/16
		11	3/4
		12	7/8
		13	1-1/8
		14	1-1/4

*NU-Inlet restricter not used

